


Film Capacitors

Series/Type: Metalized Polypropylene MPP-AC High Stability Capacitors
Series code: 159

Part Number Description

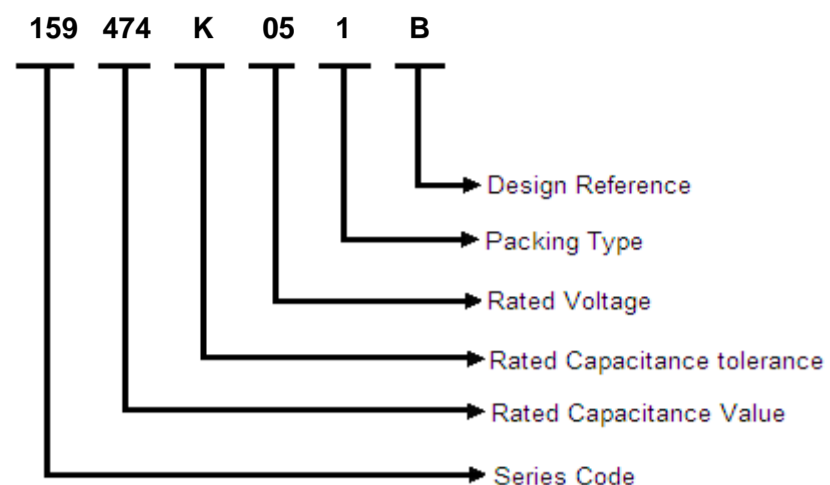

Rated Capacitance

Three-digit (474) indicate rated capacitance in Pico Farad (First two digits indicate value & third digit indicates number of zeroes to be suffixed to first two digits).

For example:

103	= 10 ×	10 ³	=	10000 pF	=	10 nF	=	0.01 μF
104	= 10 ×	10 ⁴	=	100000 pF	=	100 nF	=	0.1 μF
105	= 10 ×	10 ⁵	=	1000000 pF	=	1000 nF	=	1 μF
106	= 10 ×	10 ⁶	=	10000000 pF	=	10000 nF	=	10 μF

Capacitance Tolerance

F = ±1%, G = ±2%, H = ±2.5%, I = ±3.5%, J = ±5%, K = ±10%, L = ±15%, M = ±20%, N=±40%

Rated Voltage

One digit and one letter (2J) or two digits (05) indicate rated voltage

Rated Voltage Codification

For AC Rated Voltage													
01	02	03	04	05	06	07	08	09	10	11	12	13	14
190 VAC	250 VAC	275 VAC	305 VAC	310 VAC	440 VAC	500 VAC	600 VAC	700 VAC	63 VAC	230 VAC	330 VAC	400 VAC	450 VAC

Features and Applications


- High temperature range
- High capacitance stability
- Low losses, Long life
- Can be used in series with mains
- Capacitive power supply
- Energy meter

159 Metallized Polypropylene MPP-AC High Stability Capacitor


*Packing Type details:

- 1: Bulk packing (original pitch)
- 2: Bulk packing (after forming & cutting)
- 3: Ammo packing (after forming & taping)
- 4: Bulk packing (after forming in original pitch without cut)
- 5: Bulk packing (after formed & without cut)
- 6: Ammo packing (Straight lead)
- 7: Bulk packing (Straight lead cut)
- 8: Reel packing (Straight lead)

Reference Data

Capacitance	0.047 μ F to 2.2 μ F
Capacitance tolerance	\pm 5%, \pm 10%
Rated AC voltage at 50/60 Hz	310VAC – 440VAC
Recommended DC Voltage	630VDC
Climatic testing class according to IEC 60068-1	40/110/56
Maximum application temperature	-40°C to +110°C
Rated temperature	+85°C
Reference standards	IEC 60384-17
Dielectric	Polypropylene
Electrodes	Metallized
Construction	Mono
Encapsulation	Encased in flame retardant box(UL 94 V0) filled with resin
Leads	Tinned wire
Marking on capacitor body	Type of capacitor, rated capacitance, rated tolerance and rated voltage will be available on each and every Capacitor. Example- MPP-AC-THB(III) D474K310V LOT NO**
Compatibility to RoHS	

Dimensions Description

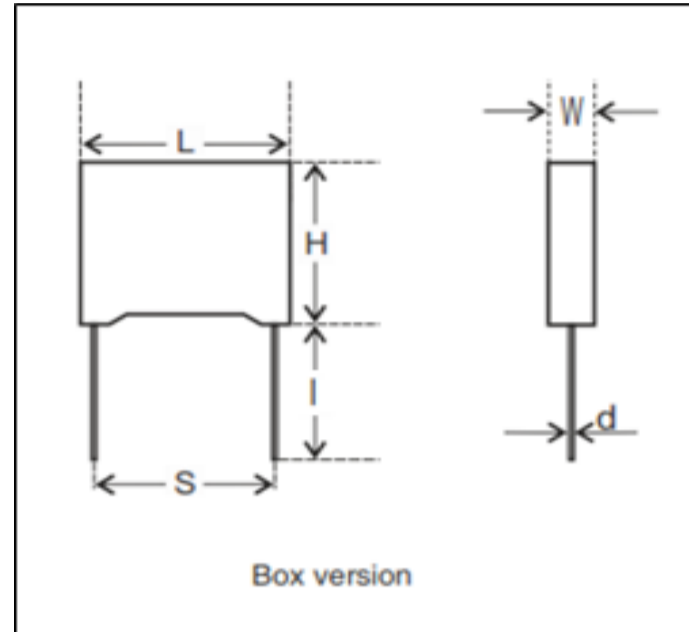

Rated Capacitance (μF)	Dimensions (mm)					l	Item Code
	L	H	W	S	d		
	(±0.5)	(±0.5)	(±0.5)	(±0.75)	(±0.05)		
0.047	13	13	7	10	0.6	15 Min.	159 473 K 05 1 A
0.068	18	12	6	15	0.8	15 Min.	159 683 K 05 1 A
0.1	18	13.5	6	15	0.8	15 Min.	159 104 K 05 1 A
0.15	18	13.5	7.5	15	0.8	15 Min.	159 154 K 05 1 A
0.20	18	14.5	8.5	15	0.8	15 Min.	159 204 J 06 1 H
0.20	18	13	7.0	15	0.8	15 Min.	159 204 K 06 1 B
0.20	26.5	15.0	6.0	22.5	0.8	15 Min.	159 204 K 06 1 A
0.21	18	14.5	8.5	15	0.8	15 Min.	159 214 K 05 1 A
0.22	18	14.5	8.5	15	0.8	15 Min.	159 224 K 05 1 A
0.27	18	16	10	15	0.8	15 Min.	159 274 K 05 1 A
0.33	18	16	10	15	0.8	15 Min.	159 334 K 05 1 B
0.33	18	16	10	15	0.8	15 Min.	159 334 J 06 1 H
0.39	18	18	10	15	0.8	15 Min.	159 394 K 05 1 B
0.41	26.5	17	8.5	22.5	0.8	15 Min.	159 414 K 06 1 A
0.47	18	19	11	15	0.8	15 Min.	159 474 K 05 1 B
0.21	26.5	15	6	22.5	0.8	15 Min.	159 214 K 05 1 C
0.21	26.5	16.5	7	22.5	0.8	15 Min.	159 214 K 05 1 B
0.22	26.5	15	6	22.5	0.8	15 Min.	159 224 K 05 1 C
0.22	26.5	16.5	7	22.5	0.8	15 Min.	159 224 K 05 1 B
0.33	26.5	16.5	7	22.5	0.8	15 Min.	159 334 K 05 1 A
0.39	26.5	17	8.5	22.5	0.8	15 Min.	159 394 K 05 1 A
0.47	26.5	17	8.5	22.5	0.8	15 Min.	159 474 K 05 1 A
0.56	26.5	19	10	22.5	0.8	15 Min.	159 564 K 05 1 A
0.68	26.5	19	10	22.5	0.8	15 Min.	159 684 K 05 1 A
0.82	26.5	20	11	22.5	0.8	15 Min.	159 824 K 05 1 A
1	26.5	22	12	22.5	0.8	15 Min.	159 105 K 05 1 B
1	32	20	11	27.5	0.8	15 Min.	159 105 K 05 1 A
1.2	32	22.5	13	27.5	0.8	15 Min.	159 125 K 05 1 A
1.2	26	25	15	22.5	0.8	15 Min.	159 125 J 06 1 H
1.5	32	22.5	13	27.5	0.8	15 Min.	159 155 K 05 1 A
1.5	26	25	15	22.5	0.8	15 Min.	159 155 J 06 1 H
1.8	32	25	14	27.5	0.8	15 Min.	159 185 K 05 1 A
2.2	32	28	14	27.5	0.8	15 Min.	159 225 K 05 1 A
2.2	32	28	14	27.5	0.8	15 Min.	159 225 M 05 1 A

only better

Specific Data

Description	Value	
Maximum tangent of loss angle(Tan δ)	at 1 kHz	
	≤ 0.001	
Voltage proof test between leads	1250 Vdc for 2 sec	
IR between leads at 100 VDC	$C_R \leq 0.33 \mu F$	$C_R > 0.33 \mu F$
	$\geq 30000 M\Omega$	$\geq 30000 s$

TBH Test

Condition 1:

- Voltage : Rated DC voltage
- Temperature : 85°C
- Humidity : 85%RH
- Duration : 1000Hours

Condition 2:

- Voltage : Rated AC voltage
- Temperature : 40°C
- Humidity : 93%RH
- Duration : 1000Hours

After The Test

$\Delta C/C$: $\leq 10\%$ of initial value.

Increase of Tan δ : ≤ 0.008 at 1 kHz

Insulation resistance : $\geq 50\%$ of the value mentioned in specific data.

Endurance Test

Loaded at 1.25 times of rated AC voltage at 85°C for 1000 hours

After The Test

$\Delta C/C$: $\leq 10\%$ of initial value.

Increase of Tan δ : ≤ 0.008 at 1 kHz

Insulation resistance : $\geq 50\%$ of the value mentioned in specific data.

Storage Conditions

Avoid storing the capacitors in places where the environmental conditions differ from the following:
Storage time: ≤ 24 months from the date marked on the label glued to the package.

- Temperature: -40 to 80°C
- Humidity:

- Average per year: $\leq 70\%$
- For 30 full days randomly distributed throughout the year: $\leq 85\%$
- Dew: absent

After a longer period of storage or use, the tolerance can increase; but, according to standard specification, it may never exceed twice the value measured at the time of delivery.

Disclaimer

All our capacitors are designed, manufactured and tested to specifications. We strictly adhere to standards in procurement of materials, in the laid down manufacturing processes and consistently apply stringent process controls and testing parameters. This ensures that our capacitors always perform to the offered specifications. Appropriateness of use in a specific circuit and fitness to a particular application however needs to be verified and its reliability through expected lifetime is required to be validated by the customer. Deki's responsibility is limited to ensuring that the capacitor performs as claimed in the specification/ data sheets provided by Deki. Deki specifically disclaims any implied warranties of fitness for any particular purpose. Liability, in any case is limited to the price paid for the capacitors.